



first floor

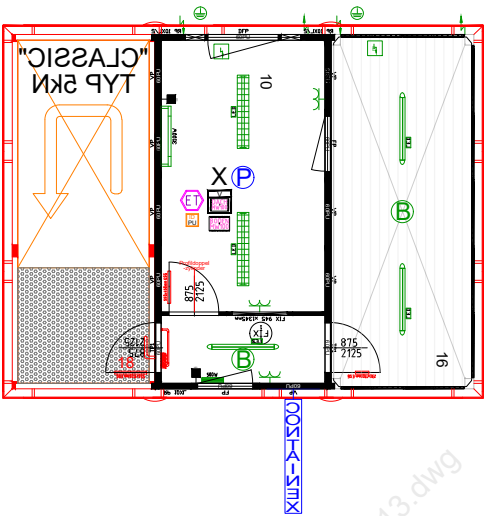

ground floor

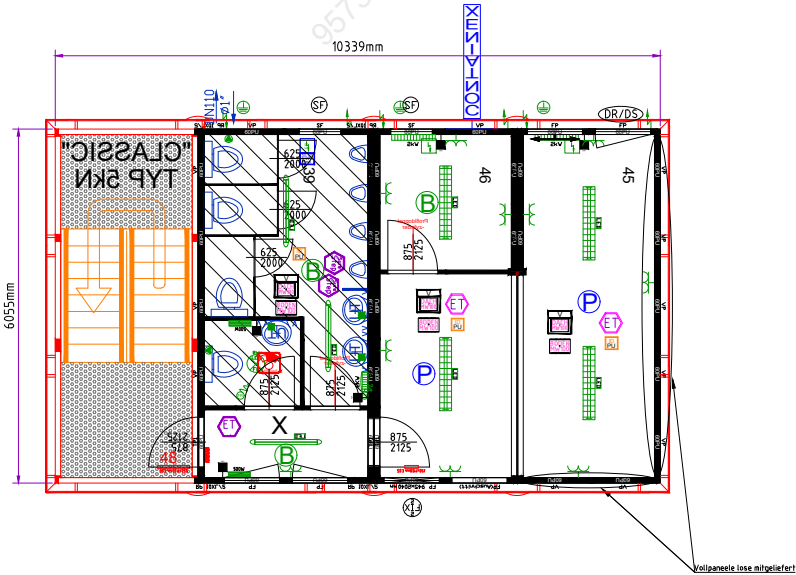

Modular building consisting of:
cabins: 5x20'+2x20'(3M)
internal height: 2340 mm
colour: R: RAL 7035 P:RAL 7035

General

- Internal finish: white
-  steel sheet version (complete)
-  Reinforced frame (optional payloads)

Electrics

- Electric GB (230V/32A/3-poles)
- flexible cable system
- B....motion detector
- P....occupancy detector

Floor assembly

- Forklift pocket distance: 2050mm
-  floor insulation: 100 mm Mineral wool
-  Eternal flooring
-  Surestep flooring - pulled up on sides

Roof assembly

- Roof insulation: 100 mm mineral wool

panels

- PU-panels (60 mm)
- incl. skirting

Doors

-  Door with WC-knob (Engaged/Vacant display)
- internal doors with cylinder

window

- floor to window frame height: 870mm
- Gas filled window
- Alu roller shutter

Sanitary

- Pressure reduction valve incl. backwash filter (GB)

Label

- Hire label - blue

Additional material

- door linking kit for modular buildings (without frame)
- fascia RAL 5010

Miscellaneous

- X....Sonderausführung XL-Container mit 2350 RIH und 100MW Dach

CONTAINEX
CLASSIC Line

Drawn by:
stiplase
Drawn on:
07.03.2024 12:54:39

Drawing No.
9573781-013.dwg

Please acknowledge and return

Date Signature, company stamp